


Specification	Pyramid holdfast filled with concrete, with bottom, for round conductor 8mm or (with adapter) for flat conductor up to 25 x 3mm or round conductor 6mm. Black. Weight: 1 kg
Article No.	45 33 16

DIN EN 62561-4:


„The fastening of holders to structures covered with tar paper, membrane and gravel roofs is not treated in the present standard due to the multitude of types which are used on modern constructions.“

For the laying of lightning-protection-conductor on flat roofs.


Customs tariff No.: 85389099

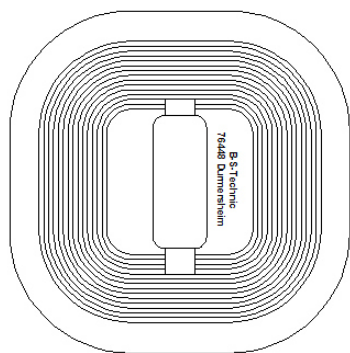

Top

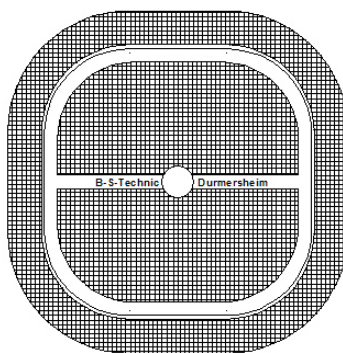


Bottom

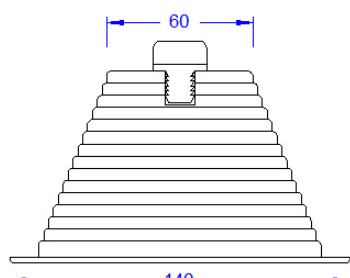


Side

Conductor height 79 mm



Front

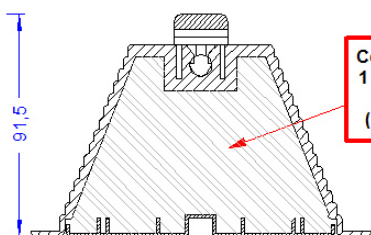

Cut

Concrete filling :
1 kg Frost-proof
concrete
(EU norm XF2)

The adapter will be delivered in a separate package and will be pressed into the holdfast together with the conductor.

Description	
Weight	1 kg
Input (with/without adapter)	6 or 8 mm conductor or Flat Conductor up to 25 x 3mm
Material of the holdfast	LD-PE , black. No halogens ; UV-stabilized and cold impact resistant.
Material of the bottom	Polypropylen, black. No halogens.
Adapter	For 6mm conductor or flat conductor up to 3 x 25mm. Glass-fiber reinforced polyamide.
Concrete	1kg frost resistant concrete. According to Euro Norm XF2.