


<b>Specification</b>	Insulating mast 5,0m long 50mm $\varnothing$ , with 1,5m fiberglass tube, 2,5m aluminum tube and 1m 10mm $\varnothing$ stainl. steel tip. Connection with multipurpose clamp 8-10 stainless steel. <b>System-weight: 8,2 kg</b>
<b>Article No.</b>	<b>68 20 75</b>

Customs tariff No.:  
85389099



Transport length: 2,5m

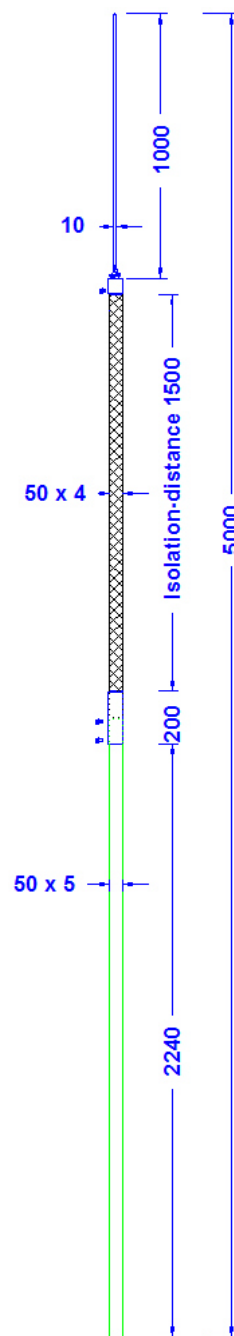

Description	
<b>Mast tip</b>	Air termination rod 10mm $\varnothing$ , 1m long, made of stainl. steel 1-4301. Completely with connecting clamp for 8-10mm conductor. Pluggable, fixed with screw.
<b>Sleeve to mount the tip</b>	Stainl. steel tube 1-4301 with 44,5mm $\varnothing$ and 60mm length. Riveted and screw-fastened.
<b>Upper part of the mast</b>	1,5m GRP-tube 40mm $\varnothing$ , light grey UV-resistant with 5mm wall thickness made of polyester UD.
<b>Connecting sleeve</b>	Stainl. steel tube 1-4301 with 44,5mm $\varnothing$ and 200mm length. Riveted and screw-fastened.
<b>Lower part of the mast</b>	Aluminum tube 50mm $\varnothing$ , 2440 mm length. Pluggable, fixed with screw.
<b>Screws/nuts/rivets/spring washers (all stainless steel)</b>	2 x DIN603M8X16; 1 x DIN933M8X10/ 1 x DIN934M10 / blind rivet 4x6 ; 2 x blind rivet 6x12 / 2 x spring washer 8; spring washer 10