


Specification	Insulating mast 6,5m long 50mm \varnothing , with 1,5m fiberglass tube, 3,8m aluminum tube and 1m 10mm \varnothing stainl. steel tip. Connection with multipurpose clamp 8-10 stainless steel. System-weight: 11,5 kg
Article No.	68 20 78

Customs tariff No.:
85389099



Transport length: 3,8m

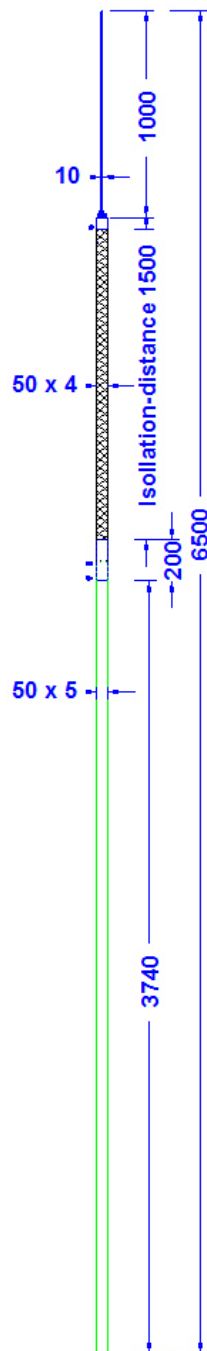

Description	
Mast tip	Air termination rod 10mm \varnothing , 1m long, made of stainl. steel 1-4301. Completely with connecting clamp for 8-10mm conductor. Pluggable, fixed with screw.
Sleeve to mount the tip	Stainl. steel tube 1-4301 with 54,5mm \varnothing and 60mm length. Riveted and screw-fastened.
Upper part of the mast	1,5m GRP-tube 40mm \varnothing , light grey UV-resistant with 5mm wall thickness made of polyester UD.
Connecting sleeve	Stainl. steel tube 1-4301 with 54,5mm \varnothing and 200mm length. Riveted and screw-fastened.
Lower part of the mast	Aluminum tube 50mm \varnothing , 3740 mm length. Pluggable, fixed with screw.
Screws/nuts/rivets/spring washers (all stainless steel)	2 x DIN603M8X16; 1 x DIN933M8X10/ 1 x DIN934M10 / blind rivet 4x6 ; 2 x blind rivet 6x12 / 2 x spring washer 8; spring washer 10